


-RA RIGHT ANGLE LEVER START DRIVERS

Model	Torque (Nm)	Torque (kgf-cm)	Torque (in-lbs)	Speed (rpm)	Screw Diameter (mm)		Power Consum.	Angle Head Part	Weight (g)(lbs)
					Machine	Tapping			
SK-B6125L-RA	0.34-1.71	3.5-17.5	3.0-15.2	1000	2.6~4.0	2.6~3.5	90W	KL-1	990g 2.2lbs
SK-B6125LF-RA				2000					
SK-B6150L-RA	1.37-3.43	14-35	12.2-30.4	1000	4.0~5.0	≤4.0	120W		



Optional Accessories

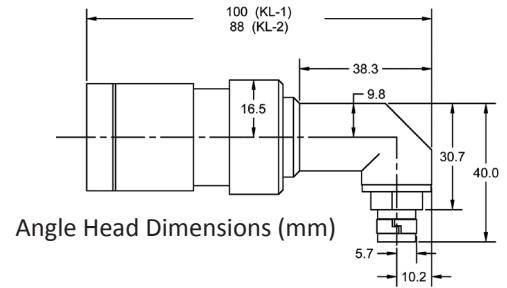

**Torque Fixing Ring
KC-7C**

Cover torque adjustment nut to deter tampering (1 included with driver)



**Suspension Rack
KH-2L**

Attach to workbench, safely holster driver when not in use (for tool without torque fixing ring)



**Spring Balancer
KL-1200**

Suspend driver dire ver work area (for tool weight of 0.6-1.5kg, 1.8m travel)