

BRUSHLESS AUTO SHUT-OFF 12V ELECTRIC SCREWDRIVERS

Torque Range:

0.01-0.34 Nm (0.07-3.08 in-lbs)


Features:

- Consistent Torque Output — Torque Accuracy $\pm 5\%$ *
- Clean, Brushless Motor Technology
- Dependable, Long Lifespan
- Requires 12VDC Power Supply (Model SKP-12HL)
- Two Speed Selections Available
- Lever Start, Push Button Reverse
- ESD Housing
- Includes 2 Meter Tool Cable, Driver Bits (PH), and Torque Fixing Ring
- Bit Holder Accepts 4mm Round Winged Bits (2 Included)

*Factory test values - actual torque results may vary depending on the specific application, operator input, and test equipment used.




SKP-12HL

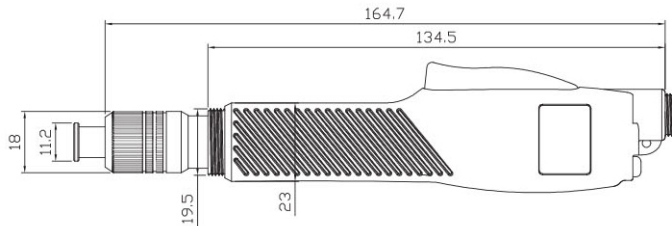

Dimensions (mm)

Optional Accessories

Model	Torque Fixing Ring	2m, 3-Pin Cable	Spring Balancer
	SKD-B100 Series	KC-9S	AA50001-27N

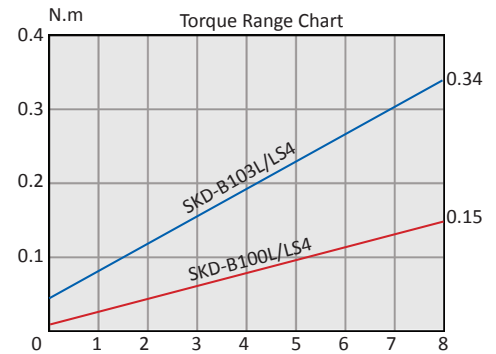

Specifications

Model (ESD Housing)	Torque (Nm)	Torque (in-lbs)	Speed (rpm)	Start Type	Power Consum.	Weight (g)(lbs)	Use with Power Supply
SKD-B100L-ESD	0.008-0.15	0.07-1.32	1000/700	Lever	15W	170g 0.4lbs	SKP-12HL
SKD-B100LS4-ESD	0.008-0.15	0.07-1.32	280/200				
SKD-B103L-ESD	0.05-0.34	0.44-3.08	1000/700				
SKD-B103LS4-ESD	0.05-0.34	0.44-3.08	280/200				