

SKC-PTA-BS20/30/45 BRUSHLESS SCREWDRIVERS

Torque Range:

0.3–4.5 Nm (2.7–40 in-lbs)

Features:

- Consistent torque output — Torque accuracy $\pm 3\%$ *
- Clean, brushless motor technology
- Dependable, long lifespan
- Two speed selections available
- Lever start, forward/reverse switch
- LEDs and audible indicators alert user to proper clutch activation at shut-off, low battery power, and current speed setting
- To conserve battery power, screwdriver enters sleep mode when idle for more than 3 seconds
- Charging station (purchased separately) provides quick recharge time (~45 minutes)
- Includes torque lock sleeve, belt clip, suspension 2 driver bits (PH #1 + PH #2)

*Factory test values - actual torque results may vary depending on the specific application, operator input, and test equipment used.



		In-Line			Right Angle		
Model		SKC-PTA-BS20	SKC-PTA-BS30	SKC-PTA-BS45	SKC-PTA-BS20/RA	SKC-PTA-BS30/RA	SKC-PTA-BS45/RA
Input Voltage		10.8V			10.8V		
1.5-3.6 Torque Range	Nm	0.3–2.0	0.8–3.0	1.5–4.5	0.3-1.6	0.8-2.4	1.5-3.6
	in-lbs	2.7–18	7.1–27	13–40	2.7-14	7.1-21	13-32
Repeatable Torque Accuracy		$\pm 3\%$			$\pm 3\%$		
Speed (rpm)		1200 / 850		700 / 500	1200 / 850		700 / 50
Start Type		Lever			Lever		
Weight (w/o battery)		0.7kg (1.5lbs)			0.95kg (2.1lbs)		
Size (L x H w/o battery)		270 x 60 mm (10.6 x 2.4 in)			320 x 60mm (12.6 x 2.4in)		
Applicable Battery		SKC-LB1025S			SKC-LB1025S		
Applicable Charging Station		SKC-P50W-S			SKC-P50W-S		
Applicable Bit Type		1/4" Hex			1/4" Hex		




Compatible with the KL-1200 Tool Balancer



LED indicators

top	OK Clutch
	NG Clutch
bottom	Low Speed Mode
	Low Battery

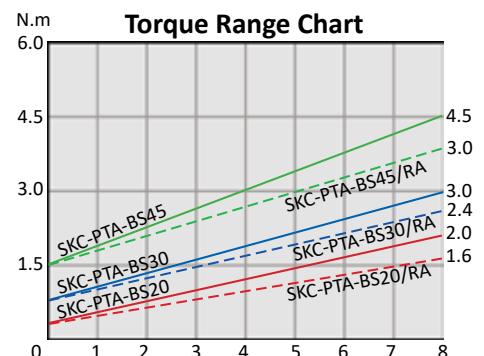

SKC-PTA-BS20/30/45 BRUSHLESS SCREWDRIVERS

SKC-LB1025S Battery

Features:

- High-performance Li-ion technology
- Built-in protection prevents battery overcharge and over discharge, extending lifespan



Specifications

Use with Tool Model	SKC-PTA-BS20/30/45
Voltage	10.8V
Rating (mAh)	2500
Dimensions (L x W x H)	51 x 46 x 90 mm
Weight	200 g
Certification	CE, ETL

SKC-P50W-S Charging Station

Features:

- Visual indicators show recharging status
- Audibly notifies user when battery is fully charged
- Fully recharges SKC-LB1025S in ~40 minutes



Specifications

Charges Battery Model	SKC-LB1025S
Input	90-240V
Output	12.6V, 3.75A
Dimensions (L x W x H)	145 x 115 x 93 mm
Weight	470 g
Certification	CE, ETL