

SKC-PTA-BS20/30/45 BRUSHLESS SCREWDRIVERS

Torque Range:

0.3–4.5 Nm (2.7–40 in-lbs)

Features:

- Consistent torque output — Torque accuracy $\pm 3\%$ *
- Clean, brushless motor technology
- Dependable, long lifespan
- Two speed selections available
- Lever start, forward/reverse switch
- LEDs and audible indicators alert user to proper clutch activation at shut-off, low battery power, and current speed setting
- To conserve battery power, screwdriver enters sleep mode when idle for more than 3 seconds
- Charging station (purchased separately) provides quick recharge time (~45 minutes)
- Includes torque lock sleeve, belt clip, suspension 2 driver bits (PH #1 + PH #2)

*Factory test values - actual torque results may vary depending on the specific application, operator input, and test equipment used.



Model	In-Line					Right Angle		
	SKC-PTA-BS12S1	SKC-PTA-BS12	SKC-PTA-BS20	SKC-PTA-BS30	SKC-PTA-BS45	SKC-PTA-BS20/RA	SKC-PTA-BS30/RA	SKC-PTA-BS45/RA
Input Voltage	7.2V		10.8V			10.8V		
Torque Range	Nm	0.2–1.2	0.3–2.0	0.8–3.0	1.5–4.5	0.3-1.6	0.8-2.4	1.5-3.6
	in-lbs	1.8–10.6	2.7–18	7.1–27	13–40	2.7-14	7.1-21	13-32
Repeatability	$\pm 3\%$					$\pm 3\%$		
Speed (rpm)	500 / 350	1000/700	1200 / 850		700 / 500	1200 / 850		700 / 500
Start Type	Lever					Lever		
Weight (w/o battery)	0.5kg (1.1lbs)		0.7kg (1.5lbs)			0.95kg (2.1lbs)		
Size (L x H w/o battery)	225 x 62 mm (8.8 x 2.4 in)		270 x 60 mm (10.6 x 2.4 in)			320 x 60mm (12.6 x 24in)		
Applicable Battery	SKC-LB0730S		SKC-LB1030S			SKC-LB1030S		
Applicable Charger	SKC-P25W		SKC-P50WN-S			SKC-P50WN-S		
Applicable Bit Type	1/4" Hex					1/4" Hex		

*ESD-safe housing available on all models— add suffix ‘-ESD’




Compatible with the KL-1200 Tool Balancer



LED indicators

top	OK Clutch
	NG Clutch
bottom	Low Speed Mode
	Low Battery

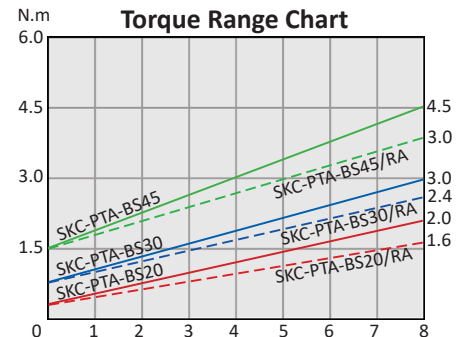

LITHIUM-ION BATTERIES & BATTERY CHARGERS

SKC-LB0730S & SKC-LB1030S Batteries

Features:

- High-performance Li-ion technology
- Built-in protection prevents battery overcharge and over discharge, extending lifespan

Specifications		
Battery Model	SKC-LB0730S	SKC-LB1030S
Use with Tool Model	SKC-PTA-BS12S1	SKC-PTA Series
Voltage	7.2V	10.8V
Rating (mAh)	3000	3000
Dimensions (L x W x H)	51 x 44 x 70 mm 2 x 1.7 x 2.7 in	51 x 46 x 90 mm 2 x 1.8 x 3.5 in
Weight	119.3g / 0.3 lbs	194g / 0.4 lbs
Certification	CE, ETL	CE, ETL



SKC-P25W & SKC-P50WN-S Charging Stations

Features:

- Visual indicators show recharging status
- Audibly notifies user when battery is fully charged
- Fully recharges SKC-LB1025S in ~40 minutes

Specifications		
Charger Model	SKC-P25W	SKC-P50WN-S
Charges Battery Model	SKC-LB0730S	SKC-LB1425
Input	100-240V	90-240V
Output	8.4V, 3.0A	12.6V, 3.75A
Dimensions (L x W x H)	145 x 115 x 101 mm 5.7 x 4.5 x 3.9 in	145 x 115 x 93 mm 5.7 x 4.5 x 3.6 in
Weight	430g / 0.9 lbs	470 g / 1.0 lbs
Certification	CE, ETL	CE, ETL

