

SKC-PTA-BS20P/30P/45P BRUSHLESS SCREWDRIVERS

Torque Range:

0.5–4.5 Nm (4.4–40 in-lbs)

Reverse trigger allows you to quickly switch from clockwise to counter-clockwise operation

Features:

- Consistent torque output — Torque accuracy $\pm 3\%$ *
- Clean, brushless motor technology
- Dependable, long lifespan
- ESD Safe Housing helps protect sensitive electronics
- Push start with lever reverse switch. Ideal for applications requiring frequent and rapid changes from forward to reverse (i.e. Terminal blocks, Threaded insert, Helicoil, Rivnuts)
- LEDs and audible indicators alert user to proper clutch activation at shut-off, low battery, and current speed setting
- To conserve battery power, screwdriver enters sleep mode when idle for more than 3 seconds
- Charging station (purchased separately) provides quick recharge time (~45 minutes)



*Factory test values - actual torque results may vary depending on the specific application, operator input, and test equipment used.

Inline Push Start (Lever Reverse)

Model	SKC-PTA-BS20P-ESD	SKC-PTA-BS30P-ESD	SKC-PTA-BS45P-ESD
Input Voltage	10.8V		
1.5-3.6 Torque Range	Nm	0.5–2.0	1.0–3.0
	in-lbs	4.4–18	8.8–27
Speed (rpm)	1200		700
Start Type	Push Start with Lever Reverse		
Weight (w/o battery)	0.72kg (1.6lbs)		
Size (L x H w/o battery)	290 x 62 mm (11.4-2.4 in)		
Applicable Battery	SKC-LB1030S		
Applicable Charging Station	SKC-P50WN-S		
Applicable Bit Type	1/4" Hex		




Compatible with the KL-1200 Tool Balancer



LED indicators

Top	OK Clutch
	NG Clutch
Bottom	Low Battery

Torque Range Chart

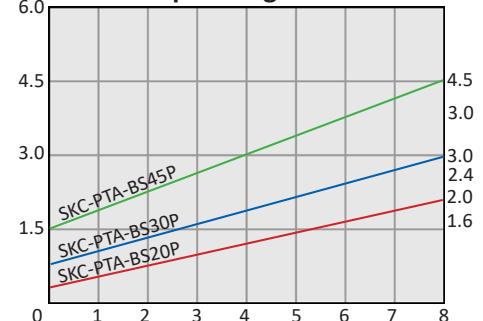

LITHIUM-ION BATTERIES & BATTERY CHARGERS

SKC-LB0730S & SKC-LB1030S Batteries

Features:

- High-performance Li-ion technology
- Built-in protection prevents battery overcharge and over discharge, extending lifespan

Specifications		
Battery Model	SKC-LB0730S	SKC-LB1030S
Use with Tool Model	SKC-PTA-BS12S1	SKC-PTA Series
Voltage	7.2V	10.8V
Rating (mAh)	3000	3000
Dimensions (L x W x H)	51 x 44 x 70 mm 2 x 1.7 x 2.7 in	51 x 46 x 90 mm 2 x 1.8 x 3.5 in
Weight	119.3g / 0.3 lbs	194g / 0.4 lbs
Certification	CE, ETL	CE, ETL



SKC-P25W & SKC-P50WN-S Charging Stations

Features:

- Visual indicators show recharging status
- Audibly notifies user when battery is fully charged
- Fully recharges SKC-LB1025S in ~40 minutes

Specifications		
Charger Model	SKC-P25W	SKC-P50WN-S
Charges Battery Model	SKC-LB0730S	SKC-LB1425
Input	100-240V	90-240V
Output	8.4V, 3.0A	12.6V, 3.75A
Dimensions (L x W x H)	145 x 115 x 101 mm 5.7 x 4.5 x 3.9 in	145 x 115 x 93 mm 5.7 x 4.5 x 3.6 in
Weight	430g / 0.9 lbs	470 g / 1.0 lbs
Certification	CE, ETL	CE, ETL

