

PISTOL BRUSHLESS SCREWDRIVERS




Torque Range:

0.5–4.5 Nm (4.4–40 in-lbs)

Features:

- Consistent torque output — Torque accuracy $\pm 3\%$ *
- Clean, brushless motor technology
- Dependable, long lifespan
- Two speed selections available
- Trigger start, forward/reverse switch
- LEDs and audible indicators alert user to proper clutch activation at shut-off, low battery, and current speed setting
- To conserve battery power, screwdriver enters sleep mode when idle for more than 3 seconds
- Charging station (purchased separately) provides quick recharge time (~45 minutes) ~~13-32~~
- Includes torque lock sleeve (DR80-20233M), belt clip, and 2 PH #2 driver bits

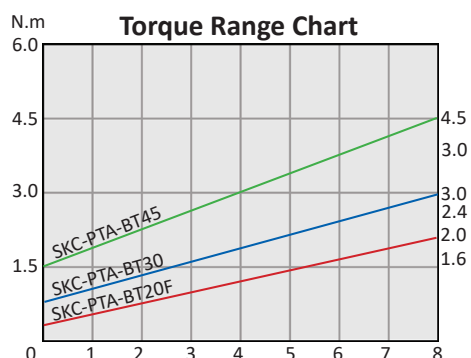

*Factory test values - actual torque results may vary depending on the specific application, operator input, and test equipment used.


Specifications

Model	SKC-PTA-BT20F	SKC-PTA-BT30	SKC-PTA-BT45	SKC-PTS-BT60		
Input Voltage	10.8V					
Torque Range	Hard Joint	Nm	0.5–2.0	0.8–3.0	1.5–4.5	2.0–6.0
		in-lbs	4.4–18	7.1–27	13–40	18–53
	Soft Joint	Nm	0.5–1.6	0.8–2.4	1.5–3.6	2.0–4.8
		in-lbs	4.4–14	7.1–21	13–32	18–42
Speed (rpm)	2700/1900	1400/1000	800/550	650/450		
Start Type	Trigger					
Weight (w/o battery)	0.7kg (1.5lbs)					
Size (L x H w/o battery)	189 x 157 mm (7.4 x 6.2 in)					
Applicable Battery	SKC-LB1030S					
Applicable Charging Station	SKC-P50WN-S					
Applicable Bit Type	1/4" Hex					

*ESD-safe housing available on all models— add suffix '-ESD'



Compatible with
KH-6
Tool Holster



LED indicators

bottom	OK Clutch
	NG Clutch
top	Low Speed Mode
	Low Battery



LITHIUM-ION BATTERIES & BATTERY CHARGERS

SKC-LB0730S & SKC-LB1030S Batteries

Features:

- High-performance Li-ion technology
- Built-in protection prevents battery overcharge and over discharge, extending lifespan

Specifications		
Battery Model	SKC-LB0730S	SKC-LB1030S
Use with Tool Model	SKC-PTA-BS12S1	SKC-PTA Series
Voltage	7.2V	10.8V
Rating (mAh)	3000	3000
Dimensions (L x W x H)	51 x 44 x 70 mm 2 x 1.7 x 2.7 in	51 x 46 x 90 mm 2 x 1.8 x 3.5 in
Weight	119.3g / 0.3 lbs	194g / 0.4 lbs
Certification	CE, ETL	CE, ETL



SKC-P25W & SKC-P50W-S Charging Stations

Features:

- Visual indicators show recharging status
- Audibly notifies user when battery is fully charged
- Fully recharges SKC-LB1025S in ~40 minutes

Specifications		
Charger Model	SKC-P25W	SKC-P50WN-S
Charges Battery Model	SKC-LB0730S	SKC-LB1425
Input	100-240V	90-240V
Output	8.4V, 3.0A	12.6V, 3.75A
Dimensions (L x W x H)	145 x 115 x 101 mm 5.7 x 4.5 x 3.9 in	145 x 115 x 93 mm 5.7 x 4.5 x 3.6 in
Weight	430g / 0.9 lbs	470 g / 1.0 lbs
Certification	CE, ETL	CE, ETL

